BS EN ISO 14040:2006

Incorporating Corrigendum No. 1

Environmental management — Life cycle assessment — Principles and framework

The European Standard EN ISO 14040:2006 has the status of a British Standard

 $ICS\ 13.020.10;\ 13.020.60$



National foreword

This British Standard is the official English language version of EN ISO 14040:2006. It is identical with ISO 14040:2006. Together with BS EN ISO 14044:2006 it supersedes BS EN ISO 14040:1997, BS EN ISO 14041:1998, BS EN ISO 14042:2000 and BS EN ISO 14043:2000.

The UK participation in its preparation was entrusted by Technical Committee SES/1, Environmental management, to Subcommittee SES/1/5, Life cycle assessment, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the *BSI Catalogue* under the section entitled "International Standards Correspondence Index", or by using the "Search" facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the EN ISO title page, the EN ISO foreword page, the ISO title page, pages ii to vi, pages 1 to 20, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 July 2006

© BSI 2006

Amendments issued since publication

Amd. No.	Date	Comments
16558 Corrigendum No. 1	31 August 2006	Correction to supersession information

ISBN 0 580 48993 0

EUROPEAN STANDARD NORME EUROPÉENNE

EUROPÄISCHE NORM

EN ISO 14040

July 2006

ICS 13.020.10; 13.020.60

Supersedes EN ISO 14040:1997, EN ISO 14041:1998, EN ISO 14042:2000, EN ISO 14043:2000

English Version

Environmental management - Life cycle assessment - Principles and framework (ISO 14040:2006)

Management environnemental - Analyse du cycle de vie - Principes et cadre (ISO 14040:2006) Umweltmanagement - Ökobilanz - Grundsätze und Rahmenbedingungen (ISO 14040:2006)

This European Standard was approved by CEN on 19 June 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION COMITÉ EUROPÉEN DE NORMALISATION EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Foreword

This document (EN ISO 14040:2006) has been prepared by Technical Committee ISO/TC 207 "Environmental management" in collaboration with CMC.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by January 2007, and conflicting national standards shall be withdrawn at the latest by January 2007.

This document supersedes EN ISO 14040:1997, EN ISO 14041:1998, EN ISO 14042:2000, EN ISO 14043:2000.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

Endorsement notice

The text of ISO 14040:2006 has been approved by CEN as EN ISO 14040:2006 without any modifications.

EN ISO 14040:2006

INTERNATIONAL STANDARD

ISO 14040

Second edition 2006-07-01

Environmental management — Life cycle assessment — Principles and framework

Management environnemental — Analyse du cycle de vie — Principes et cadre



Cont	rents Page	ge
Forewo	ord	iv
Introdu	uction	. v
1	Scope	. 1
2	Normative references	. 1
3	Terms and definitions	. 1
4 4.1	General description of life cycle assessment (LCA) Principles of LCA	. 6 . 6
4.2 4.3 4.4	Phases of an LCA	. 7 . 8
5 5.1 5.2 5.3 5.4 5.5	Methodological framework General requirements Goal and scope definition Life cycle inventory analysis (LCI) Life cycle impact assessment (LCIA) Life cycle interpretation	11 11 13 14
6	Reporting	16
7 7.1 7.2 7.3	Critical review General Need for critical review Critical review processes	17 17
Annex	A (informative) Application of LCA	18
Bibliog	graphy	20

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14040 was prepared by Technical Committee ISO/TC 207, *Environmental management*, Subcommittee SC 5, *Life cycle assessment*.

This second edition of ISO 14040, together with ISO 14044:2006, cancels and replaces ISO 14040:1997, ISO 14041:1998, ISO 14042:2000 and ISO 14043:2000, which have been technically revised.

Introduction

The increased awareness of the importance of environmental protection, and the possible impacts associated with products ¹⁾, both manufactured and consumed, has increased interest in the development of methods to better understand and address these impacts. One of the techniques being developed for this purpose is life cycle assessment (LCA).

LCA can assist in

- identifying opportunities to improve the environmental performance of products at various points in their life cycle,
- informing decision-makers in industry, government or non-government organizations (e.g. for the purpose
 of strategic planning, priority setting, product or process design or redesign),
- the selection of relevant indicators of environmental performance, including measurement techniques, and
- marketing (e.g. implementing an ecolabelling scheme, making an environmental claim, or producing an environmental product declaration).

For practitioners of LCA, ISO 14044 details the requirements for conducting an LCA.

LCA addresses the environmental aspects and potential environmental impacts ²⁾ (e.g. use of resources and the environmental consequences of releases) throughout a product's life cycle from raw material acquisition through production, use, end-of-life treatment, recycling and final disposal (i.e. cradle-to-grave).

There are four phases in an LCA study:

- a) the goal and scope definition phase,
- b) the inventory analysis phase,
- c) the impact assessment phase, and
- d) the interpretation phase.

The scope, including the system boundary and level of detail, of an LCA depends on the subject and the intended use of the study. The depth and the breadth of LCA can differ considerably depending on the goal of a particular LCA.

The life cycle inventory analysis phase (LCI phase) is the second phase of LCA. It is an inventory of input/output data with regard to the system being studied. It involves collection of the data necessary to meet the goals of the defined study

The life cycle impact assessment phase (LCIA) is the third phase of the LCA. The purpose of LCIA is to provide additional information to help assess a product system's LCI results so as to better understand their environmental significance.

¹⁾ In this International Standard, the term "product" includes services.

²⁾ The "potential environmental impacts" are relative expressions, as they are related to the functional unit of a product system.

EN ISO 14040:2006

Life cycle interpretation is the final phase of the LCA procedure, in which the results of an LCI or an LCIA, or both, are summarized and discussed as a basis for conclusions, recommendations and decision-making in accordance with the goal and scope definition.

There are cases where the goal of an LCA can be satisfied by performing only an inventory analysis and an interpretation. This is usually referred to as an LCI study.

This International Standard covers two types of studies: life cycle assessment studies (LCA studies) and life cycle inventory studies (LCI studies). LCI studies are similar to LCA studies but exclude the LCIA phase. LCI studies are not to be confused with the LCI phase of an LCA study.

Generally, the information developed in an LCA or LCI study can be used as part of a much more comprehensive decision process. Comparing the results of different LCA or LCI studies is only possible if the assumptions and context of each study are equivalent. Therefore this International Standard contains several requirements and recommendations to ensure transparency on these issues.

LCA is one of several environmental management techniques (e.g. risk assessment, environmental performance evaluation, environmental auditing, and environmental impact assessment) and might not be the most appropriate technique to use in all situations. LCA typically does not address the economic or social aspects of a product, but the life cycle approach and methodologies described in this International Standard can be applied to these other aspects.

This International Standard, like other International Standards, is not intended to be used to create non-tariff trade barriers or to increase or change an organization's legal obligations.

Environmental management — Life cycle assessment — Principles and framework

1 Scope

This International Standard describes the principles and framework for life cycle assessment (LCA) including

- a) the goal and scope definition of the LCA,
- b) the life cycle inventory analysis (LCI) phase,
- c) the life cycle impact assessment (LCIA) phase,
- d) the life cycle interpretation phase,
- e) reporting and critical review of the LCA,
- f) limitations of the LCA,
- g) relationship between the LCA phases, and
- conditions for use of value choices and optional elements.

This International Standard covers life cycle assessment (LCA) studies and life cycle inventory (LCI) studies. It does not describe the LCA technique in detail, nor does it specify methodologies for the individual phases of the LCA.

The intended application of LCA or LCI results is considered during the goal and scope definition, but the application itself is outside the scope of this International Standard.

This International Standard is not intended for contractual or regulatory purposes or registration and certification.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14044, Environmental management — Life cycle assessment — Requirements and guidelines

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

life cycle

consecutive and interlinked stages of a product system, from raw material acquisition or generation from natural resources to final disposal

3.2

life cycle assessment

LCA

compilation and evaluation of the inputs, outputs and the potential environmental impacts of a product system throughout its life cycle

3.3

life cycle inventory analysis

LCI

phase of life cycle assessment involving the compilation and quantification of inputs and outputs for a product throughout its life cycle

3.4

life cycle impact assessment

LCIA

phase of life cycle assessment aimed at understanding and evaluating the magnitude and significance of the potential environmental impacts for a product system throughout the life cycle of the product

3.5

life cycle interpretation

phase of life cycle assessment in which the findings of either the inventory analysis or the impact assessment, or both, are evaluated in relation to the defined goal and scope in order to reach conclusions and recommendations

3.6

comparative assertion

environmental claim regarding the superiority or equivalence of one product versus a competing product that performs the same function

3.7

transparency

open, comprehensive and understandable presentation of information

3.8

environmental aspect

element of an organization's activities, products or services that can interact with the environment

[ISO 14001:2004, definition 3.6]

3.9

product

any goods or service

NOTE 1 The product can be categorized as follows:

- services (e.g. transport);
- software (e.g. computer program, dictionary);
- hardware (e.g. engine mechanical part);
- processed materials (e.g. lubricant).

NOTE 2 Services have tangible and intangible elements. Provision of a service can involve, for example, the following:

- an activity performed on a customer-supplied tangible product (e.g. automobile to be repaired);
- an activity performed on a customer-supplied intangible product (e.g. the income statement needed to prepare a tax return);
- the delivery of an intangible product (e.g. the delivery of information in the context of knowledge transmission);
- the creation of ambience for the customer (e.g. in hotels and restaurants).

Software consists of information and is generally intangible and can be in the form of approaches, transactions or procedures.

Hardware is generally tangible and its amount is a countable characteristic. Processed materials are generally tangible and their amount is a continuous characteristic.

NOTE 3 Adapted from ISO 14021:1999 and ISO 9000:2005.

3.10

co-product

any of two or more products coming from the same unit process or product system

3.11

process

set of interrelated or interacting activities that transforms inputs into outputs

[ISO 9000:2005, definition 3.4.1 (without notes)]

3.12

elementary flow

material or energy entering the system being studied that has been drawn from the environment without previous human transformation, or material or energy leaving the system being studied that is released into the environment without subsequent human transformation

3.13

energy flow

input to or output from a unit process or product system, quantified in energy units

NOTE Energy flow that is an input can be called an energy input; energy flow that is an output can be called an energy output.

3.14

feedstock energy

heat of combustion of a raw material input that is not used as an energy source to a product system, expressed in terms of higher heating value or lower heating value

NOTE Care is necessary to ensure that the energy content of raw materials is not counted twice.

3.15

raw material

primary or secondary material that is used to produce a product

NOTE Secondary material includes recycled material.

3.16

ancillary input

material input that is used by the unit process producing the product, but which does not constitute part of the product

allocation

partitioning the input or output flows of a process or a product system between the product system under study and one or more other product systems

3.18

cut-off criteria

specification of the amount of material or energy flow or the level of environmental significance associated with unit processes or product system to be excluded from a study

3.19

data quality

characteristics of data that relate to their ability to satisfy stated requirements

3.20

functional unit

quantified performance of a product system for use as a reference unit

3.21

input

product, material or energy flow that enters a unit process

NOTE Products and materials include raw materials, intermediate products and co-products.

3.22

intermediate flow

product, material or energy flow occurring between unit processes of the product system being studied

3.23

intermediate product

output from a unit process that is input to other unit processes that require further transformation within the system

3.24

life cycle inventory analysis result

LCI result

outcome of a life cycle inventory analysis that catalogues the flows crossing the system boundary and provides the starting point for life cycle impact assessment

3.25

output

product, material or energy flow that leaves a unit process

NOTE Products and materials include raw materials, intermediate products, co-products and releases.

3.26

process energy

energy input required for operating the process or equipment within a unit process, excluding energy inputs for production and delivery of the energy itself

3.27

product flow

products entering from or leaving to another product system

3.28

product system

collection of unit processes with elementary and product flows, performing one or more defined functions, and which models the life cycle of a product

reference flow

measure of the outputs from processes in a given product system required to fulfil the function expressed by the functional unit

3.30

releases

emissions to air and discharges to water and soil

3.31

sensitivity analysis

systematic procedures for estimating the effects of the choices made regarding methods and data on the outcome of a study

3.32

system boundary

set of criteria specifying which unit processes are part of a product system

NOTE The term "system boundary" is not used in this International Standard in relation to LCIA.

3.33

uncertainty analysis

systematic procedure to quantify the uncertainty introduced in the results of a life cycle inventory analysis due to the cumulative effects of model imprecision, input uncertainty and data variability

NOTE Either ranges or probability distributions are used to determine uncertainty in the results.

3.34

unit process

smallest element considered in the life cycle inventory analysis for which input and output data are quantified

3.35

waste

substances or objects which the holder intends or is required to dispose of

NOTE This definition is taken from the *Basel Convention on the Control of Transboundary Movements of Hazardous Wastes and Their Disposal* (22 March 1989), but is not confined in this International Standard to hazardous waste.

3.36

category endpoint

attribute or aspect of natural environment, human health, or resources, identifying an environmental issue giving cause for concern

3.37

characterization factor

factor derived from a characterization model which is applied to convert an assigned life cycle inventory analysis result to the common unit of the category indicator

NOTE The common unit allows calculation of the category indicator result.

3.38

environmental mechanism

system of physical, chemical and biological processes for a given impact category, linking the life cycle inventory analysis results to category indicators and to category endpoints

3.39

impact category

class representing environmental issues of concern to which life cycle inventory analysis results may be assigned

impact category indicator

quantifiable representation of an impact category

NOTE The shorter expression "category indicator" is used in this International Standard for improved readability.

3.41

completeness check

process of verifying whether information from the phases of a life cycle assessment is sufficient for reaching conclusions in accordance with the goal and scope definition

3.42

consistency check

process of verifying that the assumptions, methods and data are consistently applied throughout the study and are in accordance with the goal and scope definition performed before conclusions are reached

3.43

sensitivity check

process of verifying that the information obtained from a sensitivity analysis is relevant for reaching the conclusions and for giving recommendations

3.44

evaluation

element within the life cycle interpretation phase intended to establish confidence in the results of the life cycle assessment

NOTE Evaluation includes completeness check, sensitivity check, consistency check, and any other validation that may be required according to the goal and scope definition of the study

3.45

critical review

process intended to ensure consistency between a life cycle assessment and the principles and requirements of the International Standards on life cycle assessment

- NOTE 1 The principles are described in this International Standard (see 4.1).
- NOTE 2 The requirements are described in ISO 14044.

3.46

interested party

individual or group concerned with or affected by the environmental performance of a product system, or by the results of the life cycle assessment

4 General description of life cycle assessment (LCA)

4.1 Principles of LCA

4.1.1 General

These principles are fundamental and should be used as guidance for decisions relating to both the planning and the conducting of an LCA.

4.1.2 Life cycle perspective

LCA considers the entire life cycle of a product, from raw material extraction and acquisition, through energy and material production and manufacturing, to use and end of life treatment and final disposal. Through such

a systematic overview and perspective, the shifting of a potential environmental burden between life cycle stages or individual processes can be identified and possibly avoided.

4.1.3 Environmental focus

LCA addresses the environmental aspects and impacts of a product system. Economic and social aspects and impacts are, typically, outside the scope of the LCA. Other tools may be combined with LCA for more extensive assessments.

4.1.4 Relative approach and functional unit

LCA is a relative approach, which is structured around a functional unit. This functional unit defines what is being studied. All subsequent analyses are then relative to that functional unit, as all inputs and outputs in the LCI and consequently the LCIA profile are related to the functional unit.

4.1.5 Iterative approach

LCA is an iterative technique. The individual phases of an LCA use results of the other phases. The iterative approach within and between the phases contributes to the comprehensiveness and consistency of the study and the reported results.

4.1.6 Transparency

Due to the inherent complexity in LCA, transparency is an important guiding principle in executing LCAs, in order to ensure a proper interpretation of the results.

4.1.7 Comprehensiveness

LCA considers all attributes or aspects of natural environment, human health and resources. By considering all attributes and aspects within one study in a cross-media perspective, potential trade-offs can be identified and assessed.

4.1.8 Priority of scientific approach

Decisions within an LCA are preferably based on natural science. If this is not possible, other scientific approaches (e.g. from social and economic sciences) may be used or international conventions may be referred to. If neither a scientific basis exists nor a justification based on other scientific approaches or international conventions is possible, then, as appropriate, decisions may be based on value choices.

4.2 Phases of an LCA

— the goal and scope definition,

4.2.1	LCA	studies	comprise	four	phases.	The	relationship	between	the	phases	is	illustrated	in	Figure	1.
These a	are													_	

 impact assessment, and interpretation. 4.2.2 LCI studies comprise three phases: 	—	inventory analysis,
·		impact assessment, and
4.2.2 LCI studies comprise three phases:	_	interpretation.
	4.2.	2 LCI studies comprise three phases:

- the goal and scope definition,
- inventory analysis, and
- interpretation.

4.2.3 LCA results may be useful inputs to a variety of decision-making processes. Direct applications of the results of LCA or LCI studies, i.e. the applications intended in the goal and scope definition of the LCA or LCI study, are depicted in Figure 1. More information on application areas for LCA can be found in Annex A.

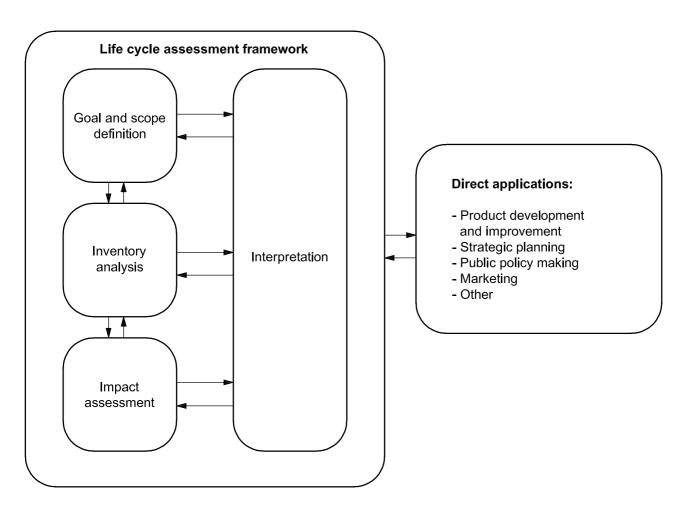


Figure 1 — Stages of an LCA

4.3 Key features of an LCA

The following list summarizes some of the key features of the LCA methodology:

- a) LCA assesses, in a systematic way, the environmental aspects and impacts of product systems, from raw material acquisition to final disposal, in accordance with the stated goal and scope;
- b) the relative nature of LCA is due to the functional unit feature of the methodology;
- c) the depth of detail and time frame of an LCA may vary to a large extent, depending on the goal and scope definition;
- d) provisions are made, depending on the intended application of the LCA, to respect confidentiality and proprietary matters;
- e) LCA methodology is open to the inclusion of new scientific findings and improvements in the state-of-theart of the technique;
- f) specific requirements are applied to LCA that are intended to be used in comparative assertions intended to be disclosed to the public;

- g) there is no single method for conducting LCA. Organizations have the flexibility to implement LCA as established in this International Standard, in accordance with the intended application and the requirements of the organization;
- h) LCA is different from many other techniques (such as environmental performance evaluation, environmental impact assessment and risk assessment) as it is a relative approach based on a functional unit; LCA may, however, use information gathered by these other techniques;
- i) LCA addresses potential environmental impacts; LCA does not predict absolute or precise environmental impacts due to
 - the relative expression of potential environmental impacts to a reference unit,
 - the integration of environmental data over space and time,
 - the inherent uncertainty in modelling of environmental impacts, and
 - the fact that some possible environmental impacts are clearly future impacts;
- j) the LCIA phase, in conjunction with other LCA phases, provides a system-wide perspective of environmental and resource issues for one or more product system(s);
- k) LCIA assigns LCI results to impact categories; for each impact category, a life cycle impact category indicator is selected and the category indicator result (indicator result) is calculated; the collection of indicator results (LCIA results) or the LCIA profile provides information on the environmental issues associated with the inputs and outputs of the product system;
- there is no scientific basis for reducing LCA results to a single overall score or number, since weighting requires value choices;
- m) life cycle interpretation uses a systematic procedure to identify, qualify, check, evaluate and present the conclusions based on the findings of an LCA, in order to meet the requirements of the application as described in the goal and scope of the study;
- n) life cycle interpretation uses an iterative procedure both within the interpretation phase and with the other phases of an LCA;
- o) life cycle interpretation makes provisions for links between LCA and other techniques for environmental management by emphasizing the strengths and limits of an LCA in relation to its goal and scope definition.

4.4 General concepts of product systems

LCA models the life cycle of a product as its product system, which performs one or more defined functions.

The essential property of a product system is characterized by its function and cannot be defined solely in terms of the final products. Figure 2 shows an example of a product system.

Product systems are subdivided into a set of unit processes (see Figure 3). Unit processes are linked to one another by flows of intermediate products and/or waste for treatment, to other product systems by product flows, and to the environment by elementary flows.

Dividing a product system into its component unit processes facilitates identification of the inputs and outputs of the product system. In many cases, some of the inputs are used as a component of the output product, while others (ancillary inputs) are used within a unit process but are not part of the output product. A unit process also generates other outputs (elementary flows and/or products) as a result of its activities. The level of modelling detail that is required to satisfy the goal of the study determines the boundary of a unit process.

The elementary flows include the use of resources and releases to air, water and land associated with the system. Interpretations may be drawn from these data, depending on the goal and scope of the LCA. These data are the LCI results and constitute the input for LCIA.

EN ISO 14040:2006

EXAMPLES

Elementary flows entering the unit process: crude oil from the ground and solar radiation.

Elementary flows leaving the unit process: emissions to air, discharges to water or soil and radiation.

Intermediate product flows: basic materials and subassemblies.

Product flows entering or leaving the system: recycled materials and components for reuse.

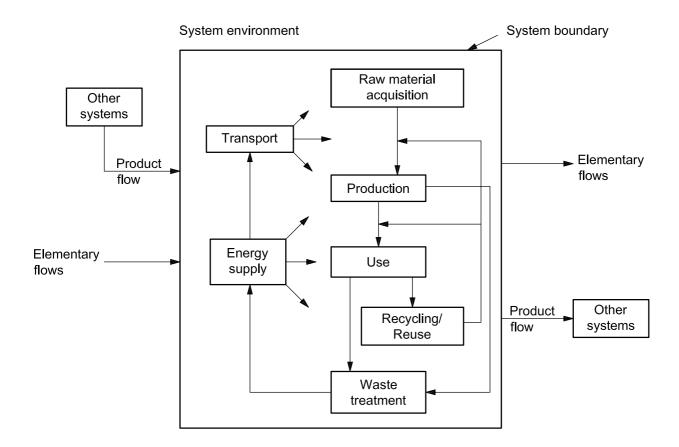


Figure 2 — Example of a product system for LCA

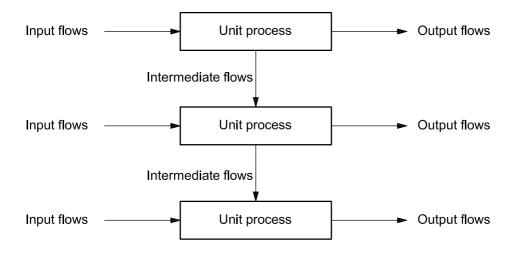


Figure 3 — Example of a set of unit processes within a product system

5 Methodological framework

5.1 General requirements

When performing an LCA, the requirements of ISO 14044 shall apply.

5.2 Goal and scope definition

5.2.1 General

5.2.1.1	The goal	of an	I CA	states
J.Z. I. I	THE GUAL	OI all	ᆫᆫᄉ	States

- the intended application,
- the reasons for carrying out the study,
- the intended audience, i.e. to whom the results of the study are intended to be communicated, and
- whether the results are intended to be used in comparative assertions intended to be disclosed to the public.

The scope should be sufficiently well defined to ensure that the breadth, depth and detail of the study are compatible and sufficient to address the stated goal.

5.2.1.2 The scope includes the following items:

 the product system to be studie 	product system to be	studied
---	----------------------	---------

— the tu	nctions of the	e product s	system or.	in the case of	of comparative	studies.	the systems
----------	----------------	-------------	------------	----------------	----------------	----------	-------------

- the functional unit;
- the system boundary;
- allocation procedures;
- impact categories selected and methodology of impact assessment, and subsequent interpretation to be used;
- data requirements;
- assumptions;
- limitations;
- initial data quality requirements;
- type of critical review, if any;
- type and format of the report required for the study.

LCA is an iterative technique, and as data and information are collected, various aspects of the scope may require modification in order to meet the original goal of the study.

5.2.2 Function, functional unit and reference flows

A system may have a number of possible functions and the one(s) selected for a study depend(s) on the goal and scope of the LCA.

The functional unit defines the quantification of the identified functions (performance characteristics) of the product. The primary purpose of a functional unit is to provide a reference to which the inputs and outputs are related. This reference is necessary to ensure comparability of LCA results. Comparability of LCA results is particularly critical when different systems are being assessed, to ensure that such comparisons are made on a common basis.

It is important to determine the reference flow in each product system, in order to fulfil the intended function, i.e. the amount of products needed to fulfil the function.

EXAMPLE In the function of drying hands, both a paper towel and an air-dryer system are studied. The selected functional unit may be expressed in terms of the identical number of pairs of hands dried for both systems. For each system, it is possible to determine the reference flow, e.g. the average mass of paper or the average volume of hot air required for one pair of hand-dry, respectively. For both systems, it is possible to compile an inventory of inputs and outputs on the basis of the reference flows. At its simplest level, in the case of paper towel, this would be related to the paper consumed. In the case of the air-dryer, this would be related to the mass of hot air needed to dry the hands.

5.2.3 System boundary

LCA is conducted by defining product systems as models that describe the key elements of physical systems. The system boundary defines the unit processes to be included in the system. Ideally, the product system should be modelled in such a manner that inputs and outputs at its boundary are elementary flows. However, resources need not be expended on the quantification of such inputs and outputs that will not significantly change the overall conclusions of the study.

The choice of elements of the physical system to be modelled depends on the goal and scope definition of the study, its intended application and audience, the assumptions made, data and cost constraints, and cut-off criteria. The models used should be described and the assumptions underlying those choices should be identified. The cut-off criteria used within a study should be clearly understood and described.

The criteria used in setting the system boundary are important for the degree of confidence in the results of a study and the possibility of reaching its goal.

When setting the system boundary, several life cycle stages, unit processes and flows should be taken into consideration, for example, the following:

- acquisition of raw materials;
- inputs and outputs in the main manufacturing/processing sequence;
- distribution/transportation;
- production and use of fuels, electricity and heat;
- use and maintenance of products;
- disposal of process wastes and products;
- recovery of used products (including reuse, recycling and energy recovery);
- manufacture of ancillary materials;
- manufacture, maintenance and decommissioning of capital equipment;
- additional operations, such as lighting and heating.

In many instances, the initially defined system boundary defined will subsequently need to be refined.

5.2.4 Data quality requirements

Data quality requirements specify in general terms the characteristics of the data needed for the study.

Descriptions of data quality are important to understand the reliability of the study results and properly interpret the outcome of the study.

5.3 Life cycle inventory analysis (LCI)

5.3.1 General

Inventory analysis involves data collection and calculation procedures to quantify relevant inputs and outputs of a product system.

The process of conducting an inventory analysis is iterative. As data are collected and more is learned about the system, new data requirements or limitations may be identified that require a change in the data collection procedures so that the goals of the study will still be met. Sometimes, issues may be identified that require revisions to the goal or scope of the study.

5.3.2 Data collection

Data for each unit process within the systems boundary can be classified under major headings, including

- energy inputs, raw material inputs, ancillary inputs, other physical inputs,
- products, co-products and waste,
- emissions to air, discharges to water and soil, and
- other environmental aspects.

Data collection can be a resource-intensive process. Practical constraints on data collection should be considered in the scope and documented in the study report.

5.3.3 Data calculation

Following the data collection, calculation procedures, including

- validation of data collected,
- the relating of data to unit processes, and
- the relating of data to the reference flow of the functional unit,

are needed to generate the results of the inventory of the defined system for each unit process and for the defined functional unit of the product system that is to be modelled.

The calculation of energy flows should take into account the different fuels and electricity sources used, the efficiency of conversion and distribution of energy flow, as well as the inputs and outputs associated with the generation and use of that energy flow.

5.3.4 Allocation of flows and releases

Few industrial processes yield a single output or are based on a linearity of raw material inputs and outputs. In fact, most industrial processes yield more than one product, and they recycle intermediate or discarded products as raw materials.

Consideration should be given to the need for allocation procedures when dealing with systems involving multiple products and recycling systems.

5.4 Life cycle impact assessment (LCIA)

5.4.1 General

The impact assessment phase of LCA is aimed at evaluating the significance of potential environmental impacts using the LCI results. In general, this process involves associating inventory data with specific environmental impact categories and category indicators, thereby attempting to understand these impacts. The LCIA phase also provides information for the life cycle interpretation phase.

The impact assessment may include the iterative process of reviewing the goal and scope of the LCA study to determine if the objectives of the study have been met, or to modify the goal and scope if the assessment indicates that they cannot be achieved.

Issues such as choice, modelling and evaluation of impact categories can introduce subjectivity into the LCIA phase. Therefore, transparency is critical to the impact assessment to ensure that assumptions are clearly described and reported.

5.4.2 Elements of LCIA

The elements of the LCIA phase are illustrated in Figure 4.

NOTE Further explanation of LCIA terminology can be found in ISO 14044.

Separation of the LCIA phase into different elements is helpful and necessary for several reasons, as follows:

- a) each LCIA element is distinct and can be clearly defined;
- b) the goal and scope definition phase of an LCA can consider each LCIA element separately;
- c) a quality assessment of the LCIA methods, assumptions and other decisions can be conducted for each LCIA element;
- LCIA procedures, assumptions and other operations within each element can be made transparent for critical review and reporting;
- e) the use of values and subjectivity (hereafter referred to as value-choices), within each element, can be made transparent for critical review and reporting.

The level of detail, choice of impacts evaluated and methodologies used depend on the goal and scope of the study.

LIFE CYCLE IMPACT ASSESSMENT

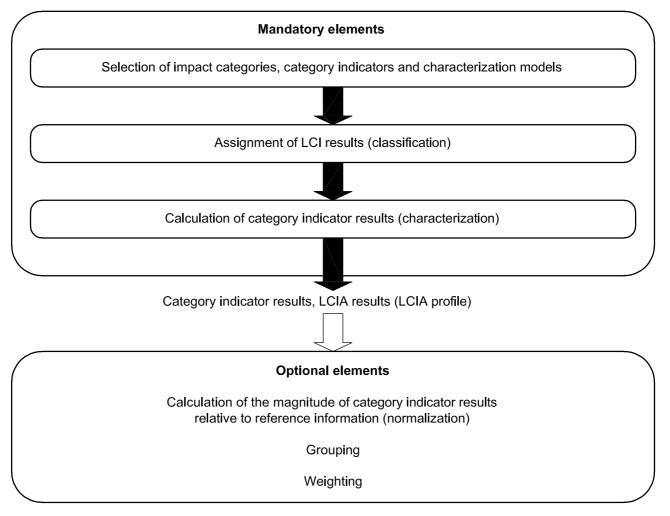


Figure 4 — Elements of the LCIA phase

5.4.3 Limitations of LCIA

The LCIA addresses only the environmental issues that are specified in the goal and scope. Therefore, LCIA is not a complete assessment of all environmental issues of the product system under study.

LCIA cannot always demonstrate significant differences between impact categories and the related indicator results of alternative product systems. This may be due to

- limited development of the characterization models, sensitivity analysis and uncertainty analysis for the LCIA phase,
- limitations of the LCI phase, such as setting the system boundary, that do not encompass all possible unit processes for a product system or do not include all inputs and outputs of every unit process, since there are cut-offs and data gaps,
- limitations of the LCI phase, such as inadequate LCI data quality which may, for instance, be caused by uncertainties or differences in allocation and aggregation procedures, and
- limitations in the collection of inventory data appropriate and representative for each impact category.

EN ISO 14040:2006

The lack of spatial and temporal dimensions in the LCI results introduces uncertainty in the LCIA results. The uncertainty varies with the spatial and temporal characteristics of each impact category.

There are no generally accepted methodologies for consistently and accurately associating inventory data with specific potential environmental impacts. Models for impact categories are in different stages of development.

5.5 Life cycle interpretation

Interpretation is the phase of LCA in which the findings from the inventory analysis and the impact assessment are considered together or, in the case of LCI studies, the findings of the inventory analysis only. The interpretation phase should deliver results that are consistent with the defined goal and scope and which reach conclusions, explain limitations and provide recommendations.

The interpretation should reflect the fact that the LCIA results are based on a relative approach, that they indicate potential environmental effects, and that they do not predict actual impacts on category endpoints, the exceeding of thresholds or safety margins or risks.

The findings of this interpretation may take the form of conclusions and recommendations to decision-makers, consistent with the goal and scope of the study.

Life cycle interpretation is also intended to provide a readily understandable, complete and consistent presentation of the results of an LCA, in accordance with the goal and scope definition of the study.

The interpretation phase may involve the iterative process of reviewing and revising the scope of the LCA, as well as the nature and quality of the data collected in a way which is consistent with the defined goal.

The findings of the life cycle interpretation should reflect the results of the evaluation element.

6 Reporting

A reporting strategy is an integral part of an LCA. An effective report should address the different phases of the study under consideration.

Report the results and conclusions of the LCA in an adequate form to the intended audience, addressing the data, methods and assumptions applied in the study, and the limitations thereof.

If the study extends to the LCIA phase and is reported to a third-party, the following issues should be reported:

- the relationship with the LCI results;
 a description of the data quality;
 the category endpoints to be protected;
 - the selection of impact categories;
 - the characterization models;
 - the factors and environmental mechanisms;
 - the indicator results profile.

The relative nature of the LCIA results and their inadequacy to predict impacts on category endpoints should also be addressed in the report. Include reference and description of value choices used in the LCIA phase of the study in relation to characterization models, normalization, weighting, etc.

Include other requirements given in ISO 14044 whenever the study results are intended to be used in comparative assertions intended to be disclosed to the public. Furthermore, in reporting the interpretation phase, ISO 14044 requires full transparency in terms of value choices, rationales and expert judgements.

7 Critical review

7.1 General

Critical review is a process to verify whether an LCA has met the requirements for methodology, data, interpretation and reporting and whether it is consistent with the principles.

In general, critical reviews of an LCA may utilize any of the review options outlined in 7.3. A critical review can neither verify nor validate the goals that are chosen for an LCA by the study commissioner, nor the ways in which the LCA results are used.

7.2 Need for critical review

A critical review may facilitate understanding and enhance the credibility of LCA, for example by involving interested parties.

The use of LCA results to support comparative assertions raises special concerns and requires critical review, since this application is likely to affect interested parties that are external to the LCA. However, the fact that a critical review has been conducted should in no way imply an endorsement of any comparative assertion that is based on an LCA study.

7.3 Critical review processes

7.3.1 General

The scope and type of critical review desired is defined in the scope phase of an LCA. The scope should identify why the critical review is being undertaken, what will be covered and to what level of detail, and who needs to be involved in the process.

The review should ensure that the classification, characterization, normalization, grouping and weighting elements are sufficient and are documented in such a way that enables the life cycle interpretation phase of the LCA to be carried out.

Confidentiality agreements regarding the content of the LCA should be entered into as needed.

7.3.2 Critical review by internal or external expert

The internal or external expert should be familiar with the requirements of LCA and should have the appropriate scientific and technical expertise.

7.3.3 Critical review by a panel of interested parties

An external independent expert should be selected by the original study commissioner to act as chairperson of a review panel of at least three members. Based on the goal, scope and budget available for the review, the chairperson should select other independent qualified reviewers.

This panel may also include other interested parties affected by the conclusions drawn from the LCA, such as government agencies, non-governmental groups, competitors and affected industries.

Annex A (informative)

Application of LCA

A.1 Application areas

A.1.1 The intended applications of LCA are addressed in 4.2 (Figure 1) in a non-exclusive, exemplary manner. The applications of LCA as such are outside the scope of this International Standard.

Further applications in the field of environmental management systems and tools include, among others:

- environmental management systems and environmental performance evaluation (ISO 14001, ISO 14004, ISO 14031 and ISO/TR 14032), for example, identification of significant environmental aspects of the products and services of an organization;
- b) environmental labels and declarations (ISO 14020, ISO 14021 and ISO 14025);
- c) integration of environmental aspects into product design and development (design for environment) (ISO/TR 14062);
- d) inclusion of environmental aspects in product standards (ISO Guide 64);
- e) environmental communication (ISO 14063);
- f) quantification, monitoring and reporting of entity and project emissions and removals, and validation, verification and certification of greenhouse gas emissions [ISO 14064 (all parts)].

There are a variety of potential further applications in private and public organizations. The list of techniques, methods and tools below does not indicate that they are based on the LCA technique as such, but that the life cycle approach, principles and framework can be beneficially applied. These are, amongst others:

сус	le approach, principles and framework can be beneficially applied. These are, amongst others:
	environmental impact assessment (EIA);
	environmental management accounting (EMA);
	assessment of policies (models for recycling, etc.);
	sustainability assessment; economic and social aspects are not included in LCA, but the procedures and guidelines could be applied by appropriate competent parties;
	substance and material flow analysis (SFA and MFA);
	hazard and risk assessment of chemicals;
	risk analysis and risk management of facilities and plants;
	product stewardship, supply chain management;
	life cycle management (LCM);
	design briefs, life cycle thinking;

life cycle costing (LCC).

Clarifications, considerations, practices, simplifications and options for the different applications are also beyond the scope of this International Standard.

A.1.2 There is no single solution as to how LCA can best be applied within the decision-making context. Each organization has to solve and decide that case by case depending (amongst others) on the size and culture of the organization, its products, the strategy, the internal systems, tools and procedures and the external drivers.

LCA may be used for a broad spectrum of applications. The individual use, adaptation and practice of LCA for all potential applications are based on this International Standard and on ISO 14044.

In addition, the LCA technique with proper justification could be applied in studies that are not LCA or LCI studies. Examples are

- cradle-to-gate studies,
- gate-to-gate studies, and
- specific parts of the life cycle (e.g. waste management, components of a product).

For those studies most requirements of this International Standard and ISO 14044 are applicable (e.g. data quality, collection and calculation as well as allocation and critical review), but not all the requirements for the system boundary.

A.1.3 For specific applications, it can be appropriate, as part of the LCIA, to determine the indicator results of each unit process or of each stage of a life cycle individually and to calculate the indicator results of the whole product system by adding up the indicator results of the different unit processes or stages.

This procedure is within the framework of this International Standard, provided that

- it has been defined within the goal and scope definition phase, and
- it is shown that the results of such an approach are identical with the results of an LCA which applies the sequence of steps according to the guidance of this International Standard and ISO 14044.

A.2 Application approach

It is necessary to consider the decision-making context when defining the scope of an LCA; i.e. the product systems studied should adequately address the products and processes affected by the intended application.

The examples of applications relate to decisions that aim for environmental improvements, which is also the overall focus of the ISO 14000 series. Therefore, the products and processes studied in an LCA are those affected by the decision that the LCA intends to support.

Some applications may not appear to immediately address improvements, such as LCA to be used for education or information about the product life cycle. However, as soon as such information is applied in practice, it is used in an improvement context. Therefore, special care is necessary to ensure that the information is applicable to the context in which it is likely to be applied.

Two possible different approaches to LCA have developed during the recent years. These are

- a) one which assigns elementary flows and potential environmental impacts to a specific product system typically as an account of the history of the product, and
- b) one which studies the environmental consequences of possible (future) changes between alternative product systems.

Bibliography

- [1] ISO 9000:2005, Quality management systems Fundamentals and vocabulary
- [2] ISO 14001:2004, Environmental management systems Requirements with guidance for use
- [3] ISO 14004:2004, Environmental management systems General guidelines on principles, systems and support techniques
- [4] ISO 14020, Environmental labels and declarations General principles
- [5] ISO 14021, Environmental labels and declarations Self-declared environmental claims (Type II environmental labelling)
- [6] ISO 14025, Environmental labels and declarations Type III environmental declarations Principles and procedures
- [7] ISO 14031, Environmental management Environmental performance evaluation Guidelines
- [8] ISO/TR 14032, Environmental management Examples of environmental performance evaluation (EPE)
- [9] ISO/TR 14047, Environmental management Life cycle impact assessment Examples of application of ISO 14042
- [10] ISO/TS 14048, Environmental management Life cycle assessment Data documentation format
- [11] ISO/TR 14049, Environmental management Life cycle assessment Examples of application of ISO 14041 to goal and scope definition and inventory analysis
- [12] ISO 14050, Environmental management Vocabulary
- [13] ISO/TR 14062, Environmental management Integrating environmental aspects into product design and development
- [14] ISO 14063, Environmental management Environmental communication Guidelines and examples
- [15] ISO 14064-1, Greenhouse gases Part 1: Specification with guidance at the organization level for quantification and reporting of greenhouse gas emissions and removals
- [16] ISO 14064-2, Greenhouse gases Part 2: Specification with guidance at the project level for quantification, monitoring and reporting of greenhouse gas emission reductions or removal enhancements
- [17] ISO 14064-3, Greenhouse gases Part 3: Specification with guidance for the validation and verification of greenhouse gas assertions
- [18] ISO Guide 64, Guide for the inclusion of environmental aspects in product standards



BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at http://www.bsi-global.com.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.

Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at http://www.bsi-global.com/bsonline.

Further information about BSI is available on the BSI website at http://www.bsi-global.com.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means — electronic, photocopying, recording or otherwise — without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager. Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553. Email: copyright@bsi-global.com.

BSI 389 Chiswick High Road London W4 4AL